
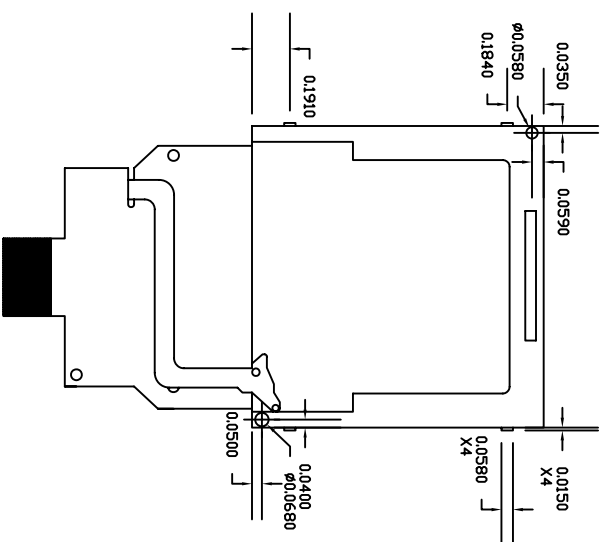


PIN DESCRIPTION

No.	Signal
1	RESET
2	GROUND
3	VCC
4	CS
5	RS
6	WR
7	RD
8	D8
9	D9
10	D10
11	D11
12	D12
13	D13
14	D14
15	D15
16	GROUND
17	N/C
18	ANODE LED
19	CATHODE LED

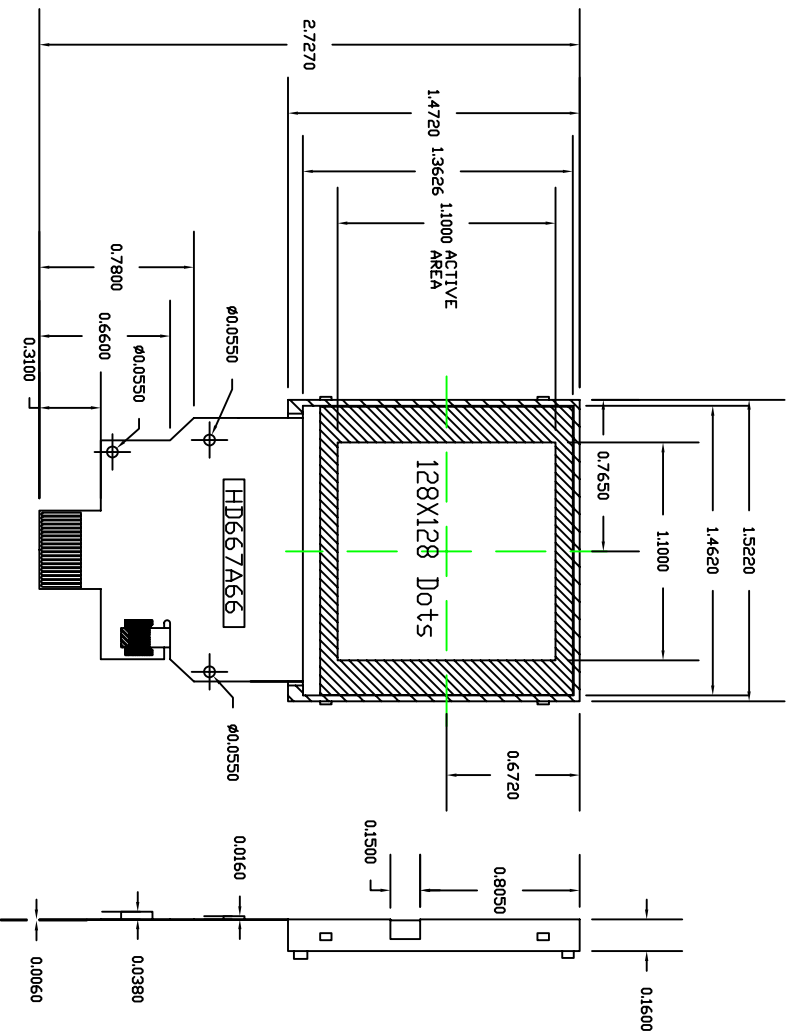

- NOTES:
- 1 DISPLAY TYPE: CSTN
  - 2 VIEWING DIRECTION: 600
  - 3 LED DRIVE IC: HD667A66
  - 4 POLARIZER MODE: TRANSMISSIVE/NEGATIVE
  - 5 DRIVE METHOD: 1/28 DUTY
  - 6 BACKLIGHT: 1 CHIP - WHITE LED
  - 7 OPERATING TEMP: -20°C -- 70°C
  - 8 STORAGE TEMP: -30°C -- 90°C
  - 9 UNMARKED TOLERANCE: 0.30°